


# Technical Specification

This document provides guidance on how to achieve performance and warranty requirements by exclusively using British Gypsum products or system specifications.

GypCeiling Grid

## C10A020 (C) (EN)

GypCeiling Grid suspended ceiling system using CasoLine Quick-Lock Grid T24 Tees with a 200mm plenum depth incorporating a Gyprex Satinspar 1200 tile.

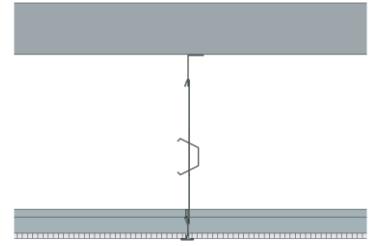

## Background

Structural background	Concrete
-----------------------	----------

## Framework

Soffit connection	<b>Gypframe MF12 Soffit Cleat</b>		
Suspension type	<b>CasoLine Quick-Lock Grid Hangers</b>	Suspension centres - Max (mm)	1200

Suspend ceiling using grid hangers with an appropriate size for the required plenum, secured to soffit cleat via hook. Alternatively, suspension wire (min. 14 swg by others) secured to soffit using fixings recommended by suspended ceiling contractor.

Primary framework	<b>CasoLine Quick-Lock Grid Main Tee 24/38</b> <b>CasoLine Quick-Lock Grid Cross Tee (1200) 24/38</b>
-------------------	--

To achieve a 600 x 1200 grid the primary framing should be installed using CasoLine Quick-Lock Grid Main Tee 24/38 at 1200mm centres, CasoLine Quick-Lock Grid Cross Tee (1200) 24/38 at 600mm centres. All tees click together.

Perimeter framing	<b>CasoLine Quick-Lock Grid Wall Angle WA03</b>
-------------------	---

Perimeter wall angles suitably fixed to structure at 300mm centres.

## Insulation

No insulation

## Board and fixings

Ceiling membrane	<b>Gyprex Satinspar 1200</b>
Ceiling board edge profile	A

## System performance

Please read performance data with any associated standards.

Minimum cavity / plenum (mm)	<b>200</b>
------------------------------	------------

Maximum cavity / plenum (mm)	<b>2010</b>
------------------------------	-------------

## Further information

**SpecSure®** system performance warranty confirms that British Gypsum proprietary systems will perform as specified for the lifetime of the building. The **SpecSure®** warranty requires that all components are specified in full and constructed in accordance with British Gypsum's installation guidance. For more details see the British Gypsum website. Always check with the design team before making any changes to the chosen specification, ensuring appropriate substantiation is sought to confirm that the solution still meets all required project performances.