



ROOMS
MADE
FOR YOU

Enquiries


British Gypsum
East Leake
Loughborough
Leicestershire
LE12 6HX

Email: questions@rmfy.co.uk

roomsmadeforyou.co.uk

Key information	
Minimum thickness	At least 3mm
m ² per bag (at 3mm)	5
Number of coats	At least 2
Finishing time (approx.)	130-150 mins
Water requirement per bag	8 litres (depending on preference)

Is Magnetic Plaster suitable for use on:	
Damp undercoats (if applying the skim coat on the same day)	Yes
Dry undercoats	Yes
Waterproof undercoats	No
Plasterboard	Yes
Moisture-resistant grade plasterboard	Yes (use ThistleBond-It first)
Re-skimming previously skimmed (and painted) surfaces	Yes (use ThistleBond-It first)
Flat smooth concrete	Yes (use ThistleBond-It first)

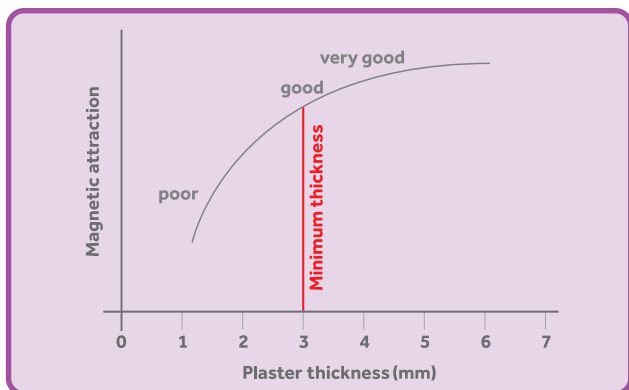

Note: Minimum temperature to be maintained until dry is 2°C.
This product should not be worked to a polished finish.
Minimum thickness is 3mm to enable a good user experience.

For more information on the 'Rooms made for you' range of products,
please visit roomsmadeforyou.co.uk

'Gyproc', 'Thistle', 'Gypframe' and 'Glasroc' are all registered trademarks of BPB United Kingdom Limited. 'Isover' is a registered trademark of Saint-Gobain Isover and 'Artex' is a registered trademark of BPB United Kingdom Limited.

BPB United Kingdom Limited is a limited company registered in England under company number 734396, having its registered office at Saint-Gobain House, Binley Business Park, Coventry, CV3 2TT, UK. BPB United Kingdom Limited trades as British Gypsum for part of its business activities.

British Gypsum reserves the right to revise product specification without notice. The information herein should not be read in isolation as it is meant only as guidance for the user, who should always ensure that they are fully conversant with the products and systems being used and their subsequent installation prior to the commencement of work. For a comprehensive and up-to-date library of information visit the British Gypsum website at: www.british-gypsum.com. For information about products supplied by Artex Limited or Saint-Gobain Isover please see their respective websites.

'British Gypsum' is a registered trademark of BPB United Kingdom Limited.



MAY 2014 BG-CSMPP-1402



EMS 543324 FM 550533



ROOMS
MADE
FOR YOU

NEW
MAGNETIC
INNOVATION

THISTLE MAGNETIC PLASTER

Transform any wall
An innovative plaster that attracts magnets



Discover the attraction of Thistle Magnetic Plaster

With our newly developed, easy-to-apply Thistle Magnetic Plaster you can transform any wall into a magnetised surface, making the ideal display board. Our innovative formula enables your customers to endlessly change what's on show – no fuss, no mess. So it's perfect for children's bedrooms, living areas, kitchens and home offices.

For display

What customer wouldn't want the freedom to arrange their favourite pictures and photographs in hundreds of different ways - and in such a novel fashion? Our Thistle Magnetic Plaster provides total flexibility and is an instant conversation starter. It even makes putting up the Christmas decorations easy as well!

For work

More and more people are working from home. And for customers who have a home office, our Thistle Magnetic Plaster can prove a real asset. Acting as a giant work board, the plaster helps organise thoughts, showcase presentations and display professional certificates. What's more, it can be combined with whiteboard paint for handy working walls.

For playing and learning

A fun activity space. An interactive classroom. Kids get both from our Thistle Magnetic Plaster walls. They can put up their favourite posters, play educational games or display their latest artwork with ease.

For the kitchen

Forget the fridge door. Use the kitchen walls for displaying the family timetable, reminder notes and other handy information.

Easy to apply

Our Thistle Magnetic Plaster can be used to transform both new and existing walls. Simply apply a minimum of 3mm thickness following the instructions opposite. It can then be decorated with standard emulsion paint or combined with specialist finishes, including blackboard and whiteboard paint.



Instructions

0 mins



- Add approximately 8 litres per bag of clean water to a mixing bucket. Gradually add the plaster whilst mixing to a preferred consistency



- Apply the first coat at 2–3mm

20 mins



- Flatten (without removing material) (Speedskims or large spatulas are useful)

45 mins



- Allow to firm up (approximately 40mins on wallboard)

60 mins

85 mins



- Mix a fresh batch and apply second coat at 1–2mm thickness

105 mins



- Trowel up as needed; avoid over polishing, avoid using water, and keep the trowel damp

150 mins



- Trowel up as needed; avoid over polishing, avoid using water, and keep the trowel damp

Times and processes are given as guidance. On-site practice may vary.



Finishing times are reduced by suction



Finishing times are extended by cold weather conditions

The magnetic attraction of a wall coated with Thistle Magnetic Plaster is determined by the thickness of the material applied and the strength of the magnets used.