


Technical Specification

This document provides guidance on how to achieve performance and warranty requirements by exclusively using British Gypsum products or system specifications.

GypLyner Independent

GIWL-146-I-80-IL-SB15-OL-SBMR15-50APR (B)

Inner layer of Gyproc SoundBloc 15mm with an outer layer of Gyproc SoundBloc MR 15mm to one side of Gypframe 146 I 80 'I' Stud framework with 50mm Isover Acoustic Partition Roll (APR 1200) between studs forming an independent lining where there is no requirement to satisfy any performance criteria. For heights up to 7500mm.

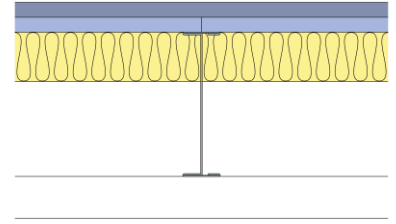

Background

Background	Suitable structural background.
------------	---------------------------------

Head design

Head channel	Gypframe 148 DC 60 Deep Flange Floor & Ceiling Channel
--------------	---

Gypframe channel suitably fixed to soffit at 600mm centres in two lines staggered by 300mm.

Deflection allowance	Vertical deflection only. To be determined by a Structural Engineer.
----------------------	--

Framework

Stud	Gypframe 146 I 80 'I' Stud
------	-----------------------------------

Stud centres - Max (mm)	600
-------------------------	-----

Abutments and openings	Gypframe 146 S 50 'C' Stud
------------------------	-----------------------------------

Gypframe 'C' stud suitably fixed to structure at 600mm centres in two lines staggered by 300mm.

Base channel	Gypframe 148 DC 60 Deep Flange Floor & Ceiling Channel
--------------	---

Gypframe channel suitably fixed to floor at 600mm centres in two lines staggered by 300mm.

Insulation

Insulation, Layer 1	50mm Isover Acoustic Partition Roll (APR 1200)
---------------------	---

Board and fixings

Board side 1, Layer 1	Gyproc SoundBloc 15mm	Screws side 1, Layer 1	British Gypsum Jack-Point Screws 25mm
-----------------------	------------------------------	------------------------	--

Board side 1, Layer 2	Gyproc SoundBloc MR 15mm	Screws side 1, Layer 2	British Gypsum Jack-Point Screws 41mm
-----------------------	---------------------------------	------------------------	--

Board layer 1 (inner), fix securely to Gypframe metal supports around the perimeter of the board at maximum 300mm centres; Board layer 2 (outer), fix securely to all Gypframe metal supports around the perimeter of the board and intermediate stud positions at maximum 300mm centres. External corners reduce fixings to 200mm. Drywall screws can be used for fixing boards to metal profiles with a thickness of 0.8mm or less (excluding 'I' studs). All joints staggered between layers. Fix working from the centre of each board. Position screws not less than 13mm from cut edges and 10mm from bound edges of boards. Set screw heads flush with plasterboard surface; do not break paper or gypsum core.

Fixing strap	Gypframe GFS1 Fixing Strap
--------------	-----------------------------------

Used to support horizontal board joints in face layer of multiple layer board linings and enable board screw fixing at 300mm centres.

Sealant	Gyproc Sealant
---------	-----------------------

Locate sealant at junctions with adjoining structure and other air paths. Apply as a continuous bead to clean, dry, dust-free surfaces, leaving no gaps. After application of sealant, bulk fill gaps between floor and underside of plasterboard using Gyproc jointing compound.

Finish coat

Finishing is not required to achieve the specified performance, but the system can be finished using either one of our Thistle or ThistlePro plasters, or Gyproc jointing products. See the product range guides on the British Gypsum website for more information.

System performance

Please read performance data with any associated standards.

Maximum height (mm)	7500
---------------------	-------------

The maximum heights quoted are based upon a limiting deflection of L/240 at 200 Pa.

Minimum cavity / offset (mm)	30
------------------------------	-----------

The minimum cavity/offset is recommended to avoid bridging between the background and metal studs over the lining system height.

Approx. weight (kg/m ²)	33
-------------------------------------	-----------